



AmericanBiltrite
Flooring



AB PURE RUBBER TILE & SHEET



ABPURE

Rubber flooring formulation that avoids color fading.

- ABPURE is a revolutionary patented formulation with far superior colorfastness, meaning **colors will not fade under light compared with traditional rubber formulas.**
- ABPURE is the **only rubber flooring product that passes the ASTM F 1515** (American Society for Testing and Materials).


Who is American Biltrite?

- In business for over 100 years.
- Producing rubber flooring since 1943.
- Manufactures the products in North America.
- Is one of the largest manufacturers of specialty commercial flooring in Canada.



ENGINEERED TO PERFORM

- 10% pre-consumer recycled content.
- PVC/Chlorine Free and FloorScore® certified for indoor air quality.
- Treated to resist the growth of fungus and mold.
- Meets ADA requirement for slip resistance.
- Superior comfort underfoot.
- Custom logo and floor design capabilities.
- Easy to install due to the high flexibility of the product: will not whiten, crack or break.
- Easy to maintain.
- Low lifecycle cost.

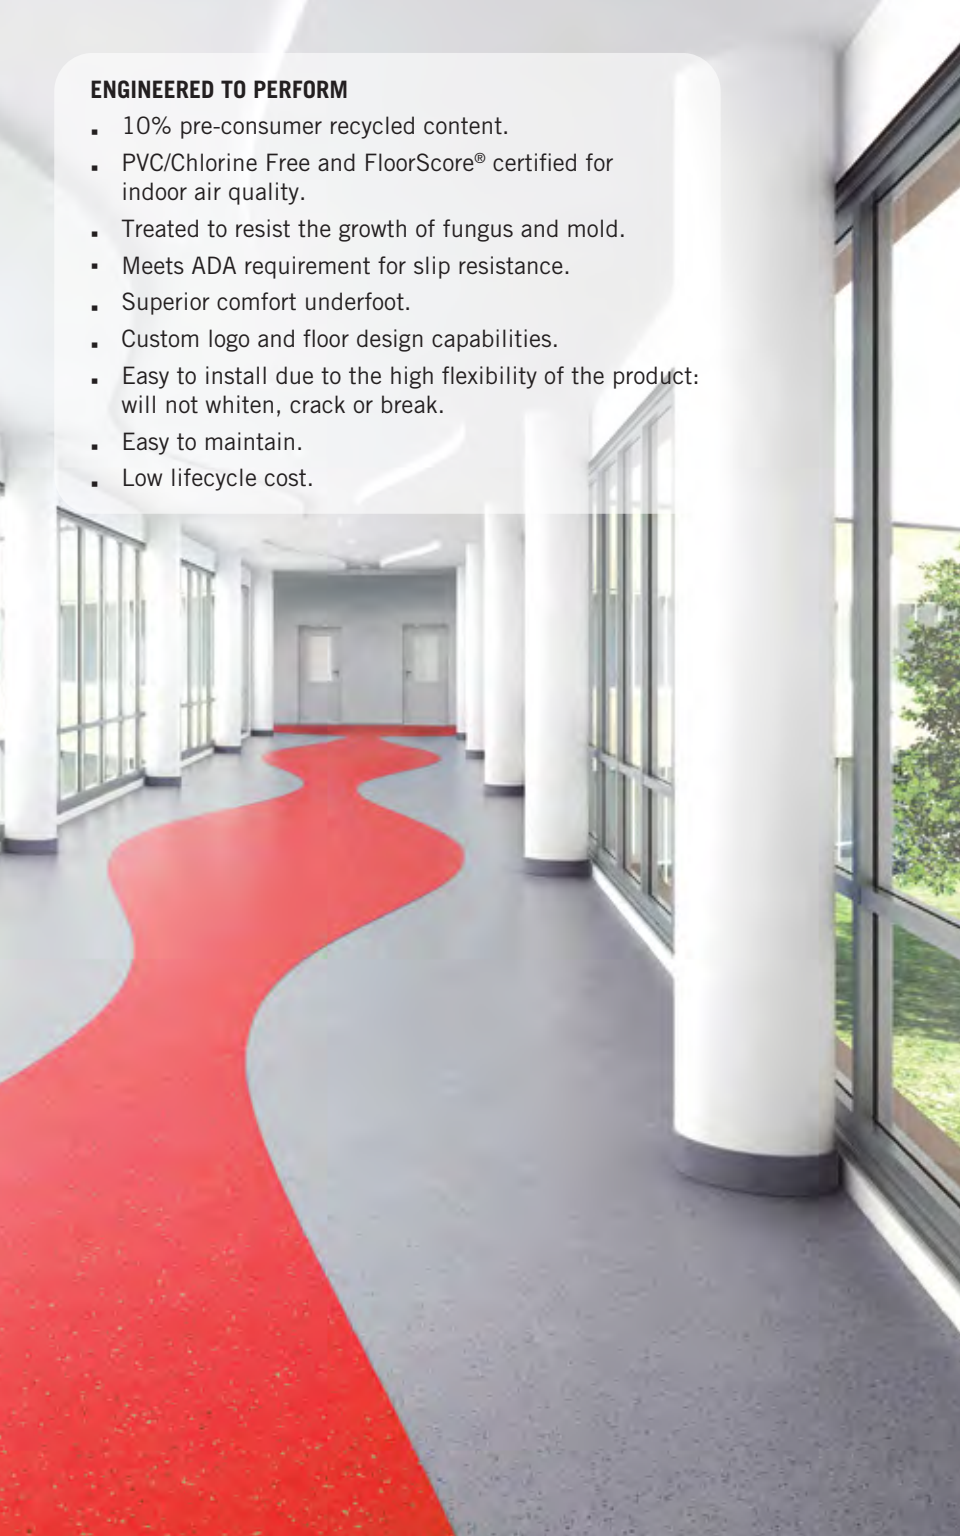

Complete your design with accessories in the same AB PURE colors* as your floors.

* Solid colors only (no chips).

STAIR TREADS

Molded Stair Treads combine easy installation, maximum resiliency and sound absorption that is ideal for stairwell projects. Regular and one piece versions are available in 36, 48 and 72". For areas requiring extra slip resistance, visually impaired configurations are also available.

Treads: regular and one-piece round for general applications and with visually impaired safety strip

Gauge	3.17 mm	1/8"
Sizes	0.914 m	36"
	1.219 m	48"
	1.828 m	72"
Depth / Regular	314.33 mm	12-3/8"
Depth / One-Piece	482.6 mm	19"
Nosing Depth	47.63 mm	1-7/8" ADA Compliant
Nosing Radius	6 mm	1/4" ADA Compliant

HEAT WELD / COLD WELD


Optional heat welding or cold welding seamless, sanitary flooring that's easy to maintain. Heat welding is available in all 36 AB PURE colors by ordering with code ABW followed by color number in the floor color chart.

Cold weld is only available in transparent.

PRO-TECH COVE

Create a long-lasting, puncture resistant sanitary barrier, impervious to moisture, dirt, bacterial and fungal contamination when heat or cold welded. AB PURE flooring is color matched and factory bonded to the aluminum construction in convenient coves to a maximum 12" up / 12" out and 10' lengths.

Available in 36 Colors




ABS-34
Glaciar




ABS-38
Steel




ABS-23
Anthracite




ABS-31
Gainsboro Valley




ABS-33
Pebble beach




ABS-37
Battleship Gray



ABS-41
Linen




ABS-30
Sand castle




ABS-32
Appalachian trail




ABS-15
Snowstorm




ABS-35
Ash gray




ABS-20
Starry night



ABS-94
Forget-me-not




ABS-95
Electric blue



ABS-68
Rich lavender




ABS-90
Baby blue




ABS-92
Aquamarine



ABS-98
Blue Lagoon



ABS-83
Pistachio




ABS-85
Olive green



ABS-87
Tundra



ABS-45
Wheat



ABS-36
Tan



ABS-39
Camouflage Green

Clarity and Longevity of Color. Guaranteed.

CUSTOM COLORS AVAILABLE. For special projects, custom colors can be created that perfectly match your design needs. Minimum order required.




ABS-73
Banana candy




ABS-74
Buff



ABS-72
Limoncello



ABS-75
Orangerine



ABS-52
Terracotta



ABS-51
Capuchin




ABS-53
Land of Fire



ABS-55
Fire engine red




ABS-66
Doll house



ABS-57
Chestnut



ABS-58 ◆
Espresso



ABS-56
Shiraz

For sizes and thicknesses see specifications on back cover
For more detailed information, please refer to website.

Profiles available

To order our product in the texture and color combination of your choice make sure to specify the **texture code as well as color code** Ex: ABS-66 for Imagine in Doll House color.

SLATE



ABF

HAMMERED



ABM

ROUND



ABR


Round profile available in base colors only (no chips)

IMAGINE (smooth paper finish)



**ABS/
ABT**

NATURAL SLATE (no chips)

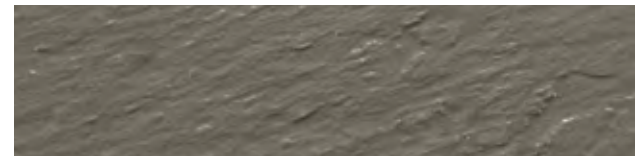

ABA

Natural Slate colors available are marked by ◆

Other profiles available on minimum order basis. Please refer to website for more information.



ABPURE®

TECHNICAL SPECIFICATIONS

Gauge	Tile	ABA, ABR, ABF, ABM, ABT ABT	3 mm 2 mm / 3 mm	0.118" 0.080" / 0.118"
Sizes	Tile	ABR ABR ABA, ABF, ABM, ABT ABA, ABF, ABM, ABT	900 mm x 900 mm 450 mm x 450 mm 905 mm x 905 mm 452 mm x 452 mm	35 1/2" X 35 1/2" 17 11/16" X 17 11/16" 35 11/16" X 35 11/16" 17 13/16" X 17 13/16"
Gauge	Sheet	ABS	2 mm / 3 mm	0.080" / 0.118"
Sizes	Sheet	ABS	1,5 m x 15,2 m	60" nominal x 50'
Composition	Homogeneous			
ASTM D 3389	Abrasion Resistance (H-18,500 g @ 1,000 cycles) (TILES)		Pass	
ASTM E 648	Critical Radiant Flux CRF (W/cm ²)		> 0.45	
ASTM E 662	Smoke Density		≤ 450	
ASTM E 989 / E 492	Sound Absorption (with a suspended ceiling)		IIC 59	
ASTM F 925	Chemical Resistance		Exceeds standards	
ASTM F 970	Static Load (modified at 1,000 psi for tile / 2,000 psi for sheet)		≤ 0.005"	
ASTM F 1514	Heat Stability		ΔE ≤ 8	
ASTM F 1515	Light Stability		ΔE ≤ 8	
ASTM F 1344	Standard specification for rubber tile		Class 1, A or B	
ASTM F 1859	Standard specification for rubber sheet		Type 1	
ASTM G 21	Antimicrobial/Antifungal Resistance Test		Pass (28 days)	
Indoor Air Quality (IAQ)	Volatile Organic Compounds (VOC's)		FloorScore Certified by SCS Certification Registration Number SCS-FS-01492	
Adhesive	AD-777		Regular traffic	
	AD-535		Heavy rolling traffic, under patients' beds, non-acclimatized entrance zones	
Limited Wear Warranty	10 years			
Resistance to oils and greases	ABPURE® is not recommended for environments where it could be exposed to oils and greases, whether mineral, animal or vegetable.			
Antimicrobial/Antifungal	IMPORTANT: All ABPURE® rubber flooring contains inhibitors that gives this flooring antimicrobial and antifungal properties.			

Please note that technical website documents prevail.

Ultra-Fresh is a registered trademark of Thomson Research Associates

INSTALLATION

Optimal results can only be achieved by following manufacturer's instructions closely. Only adhesives approved by American Biltrite specifically for AB PURE should be used for gluing. Detailed installation instructions can be found at american-biltrite.com and should be carefully followed.



American Academy of Healthcare
Interior Designers

American Biltrite 200 Bank Street, Sherbrooke,
Quebec J1H 4K3 Canada | american-biltrite.com
To order samples: flooring@american-biltrite.com
1.800.437.8743 | Technical Services: 1.800.479.0190

® ABPURE is a registered trademark of
American Biltrite

PRINTED IN CANADA BRO-E6-PUR ISSUED 12/2016