AmericanBiltrite
Flooring

NO WAX

GLOSS OPTIONS

TEXAS GRANITE®

SOLID VINYL TILE

Texas Granite®

Texas Granite®

Trusted Performance, Enduring Style and Versatility.

NO WAX

The floor that never needs to be waxed to stay beautiful
- Set your own gloss level by simple buffing—no wax required
- Classic Terrazzo design

Decades of proven performance
- Long-wearing homogeneous construction
- 20-year commercial limited warranty

Easy maintenance
- Occupancy ready
- Easily repairable, spot cleaning possible
- No stripping or waxing required

Phthalate-free and low VOC

FloorScore® certified

VTG-194 ANDROS BLUE, VTG-147 MISSION WHITE ▶

Texas Granite is backed by proven performance over decades of use in heavy commercial environments.

VTG-180 HERB, VTG-130 WHITE/GREY ◄
VTG-130 WHITE/GREY ▼

VTG-135 GREY/WHITE, VTG-130 WHITE/GREY ▲

VTG-135 GREY/WHITE, VTG-130 WHITE/GREY ▲
VTG-117 LUXE GREY, VTG-133 MINERAL GREY,
VTG-158 SOFT BROWN ►

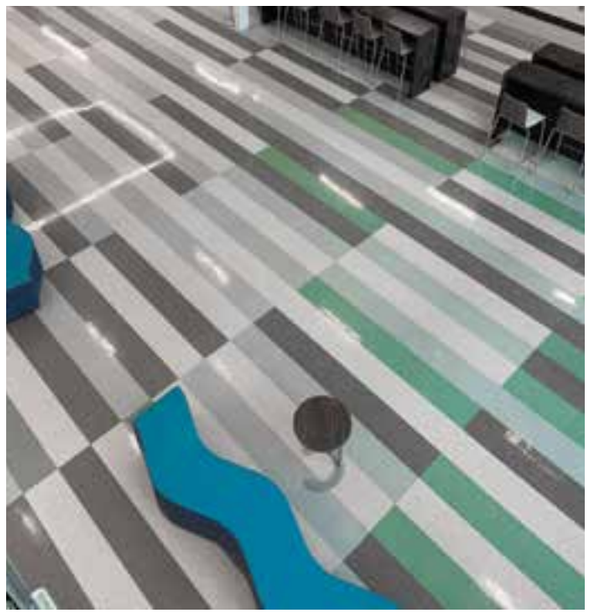

"I looked at a lot of flooring and Texas Granite caught my eye for a few reasons. It had a look very similar to Terrazzo with a quiet soft feel when you walk on it. It alleviates all maintenance that is a necessity with VCT and wears very well. And lastly, it is one of the most attractive floors on the market."

Charlie Privett
Director of Buildings and Grounds
Deerfield Public School District 109

Texas Granite's range of tone-on-tone colors allows for harmonious layouts effortlessly.

Neutrals

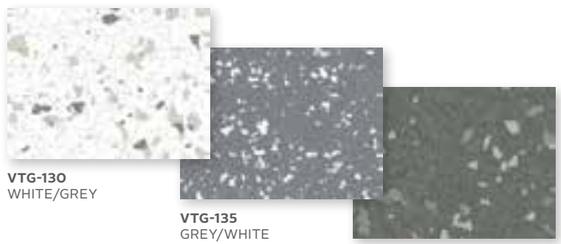

VTG-130
WHITE/GREY

VTG-135
GREY/WHITE

VTG-137
GREY

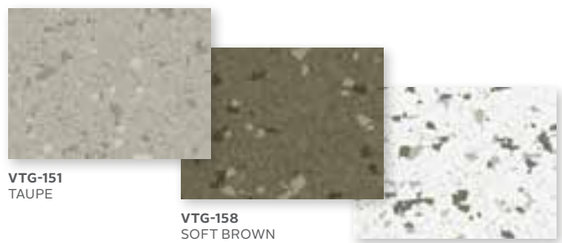

VTG-151
TAUPE

VTG-158
SOFT BROWN

VTG-143
WHITE/TAUPE

Earth tones

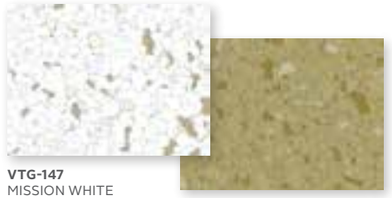

VTG-147
MISSION WHITE

VTG-172
NOUVEAU GOLD

VTG-119
HONEST BEIGE

VTG-146
ALMOND SHELL

Eco chromas

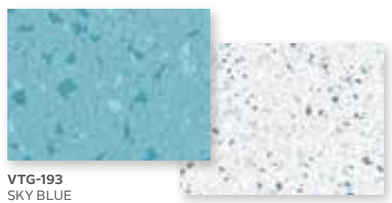

VTG-193
SKY BLUE

VTG-190
WHITE/BLUE

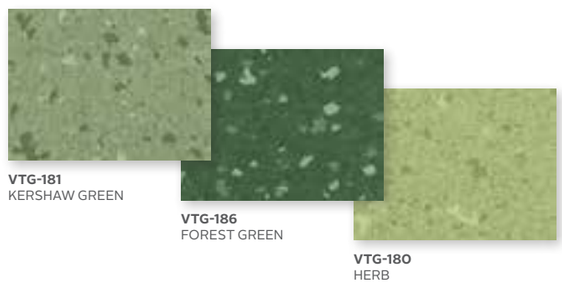

VTG-181
KERSHAW GREEN

VTG-186
FOREST GREEN

VTG-180
HERB

Texas Granite always in style.

The Texas Granite color palette consists of 3 color families that allow for mix and match harmony throughout the classic Terrazzo styling line. Available in 3 formats to create unlimited flooring patterns and wayfinding.

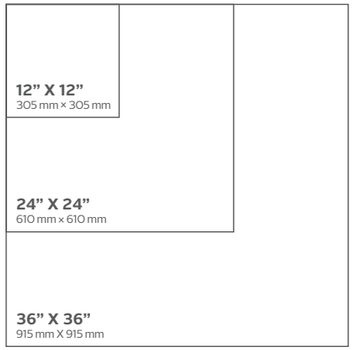

VTG-156, VTG-146, VTG-134, VTG-147, VTG-175 ▲

Neutrals

VTG-115 WHITE

VTG-143 WHITE/TAUPE

VTG-147 MISSION WHITE

VTG-140 ROSE TALBERT/TAUPE

ALSO AVAILABLE AS CONDUCTIVE OR STATIC DISSIPATIVE TILE.

VTG-130 WHITE/GREY

VTG-190 WHITE/BLUE

VTG-134 BOWLING GREEN

VTG-117 LUXE GREY

VTG-133 MINERAL GREY

VTG-137 GREY

VTG-135 GREY/WHITE

Earth Tones

VTG-152 WARM GREY

VTG-146 ALMOND SHELL

VTG-119 HONEST BEIGE

VTG-151 TAUPE

VTG-158 SOFT BROWN

VTG-172 NOUVEAU GOLD

VTG-175 PRIMARY YELLOW

VTG-177 AMBER

VTG-156 SPICE RED

Chromatic

VTG-180 HERB

VTG-181 KERSHAW GREEN

VTG-186 FOREST GREEN

VTG-193 SKY BLUE

VTG-194 ANDROS BLUE

VTG-199 CAROLINA SAILING

VTG-197 PRIMARY BLUE

VTG-157 PRIMARY RED

VTG-167 MYSTIC PURPLE

TEXAS GRANITE CAN BE FLASH COVED AND HEAT WELDED FOR INCREASED HYGIENE.



HEAT WELDING RODS ARE AVAILABLE IN 10 COORDINATING COLORS. SEE COLOR RANGE ON PAGE 18.

VTG-166 PAM'S PLACE

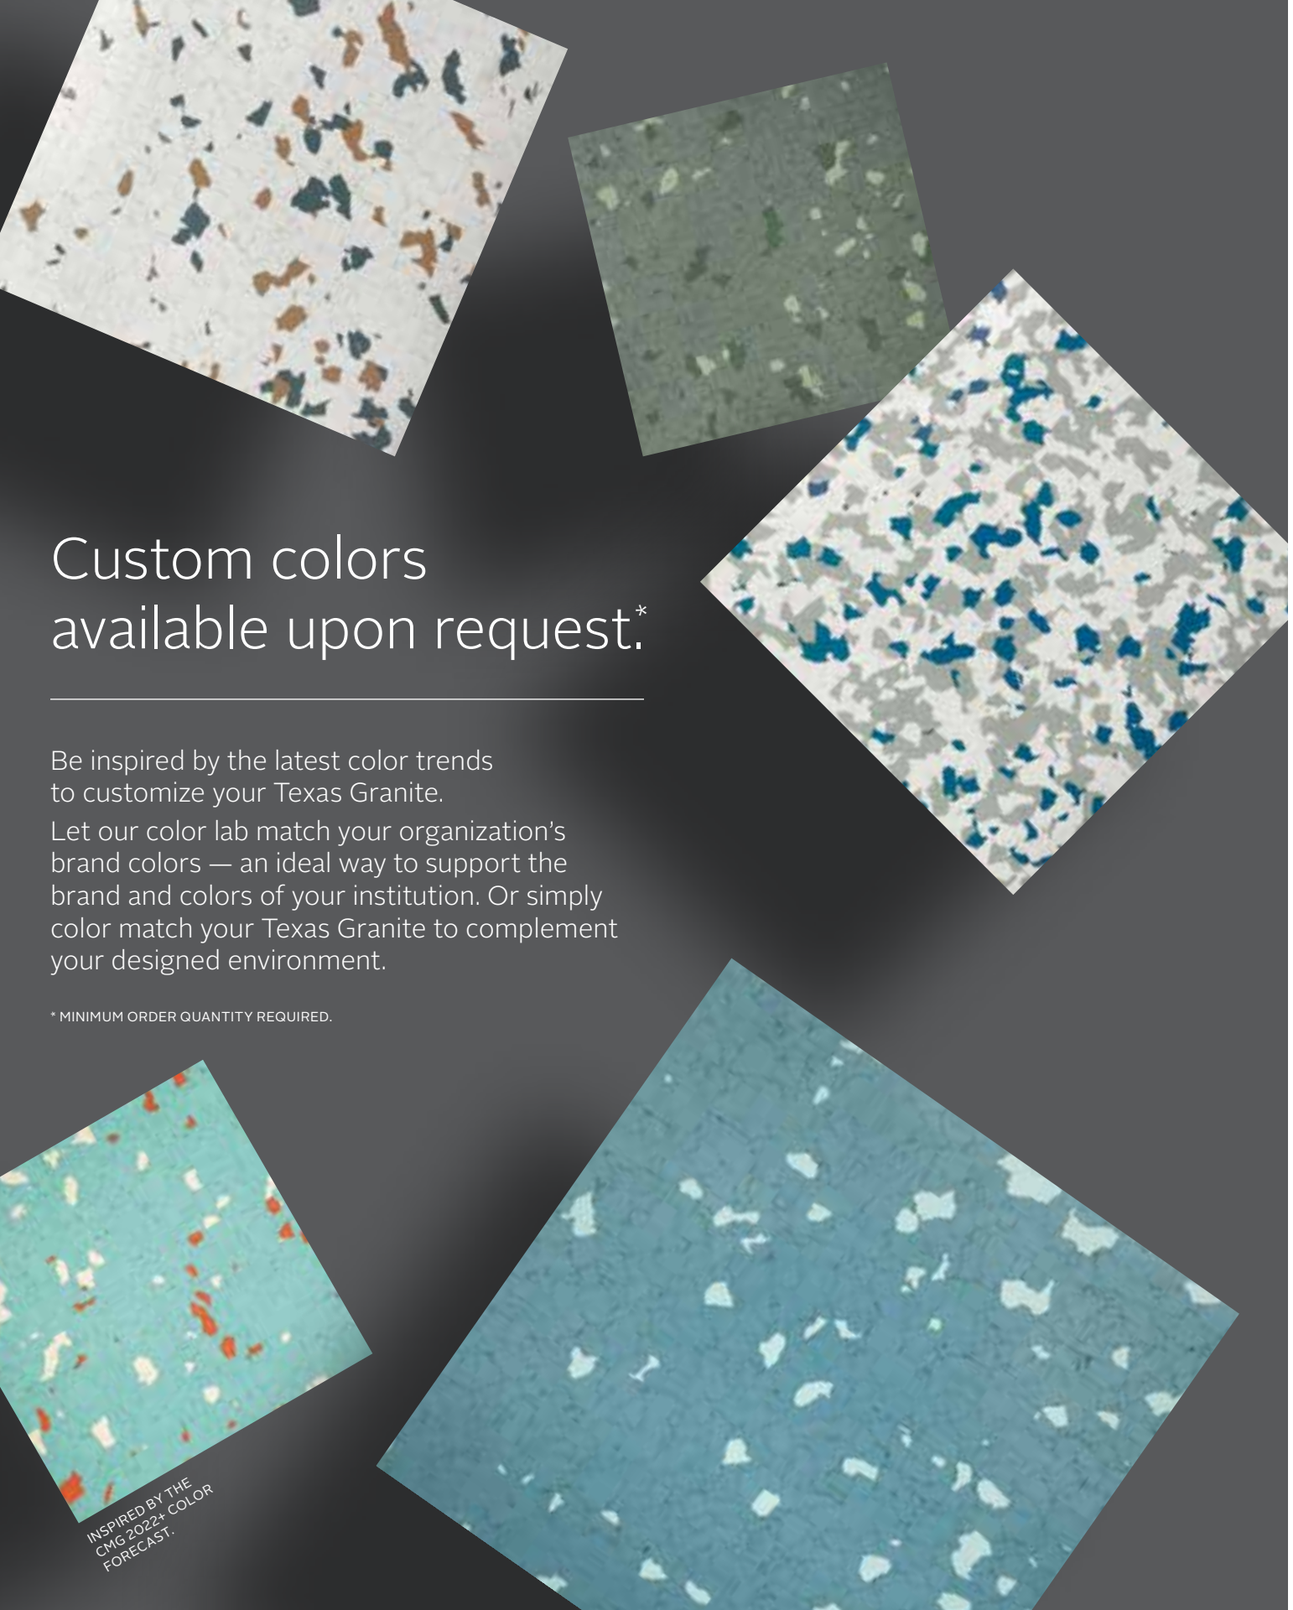

Custom colors available upon request.*

Be inspired by the latest color trends to customize your Texas Granite.

Let our color lab match your organization's brand colors — an ideal way to support the brand and colors of your institution. Or simply color match your Texas Granite to complement your designed environment.

* MINIMUM ORDER QUANTITY REQUIRED.

INSPIRED BY THE CMG 2022+ COLOR FORECAST.

Create your own TexasGranite color combinations with the interactive online design tool **MyTexasGranite™**.

Custom-colored flooring is only a click away.

To get started...

Go to the Texas Granite page on our website or scan the QR code.

VTG-130 WHITE/GREY, VTG-134 BOWLING GREEN ▲

Seamless look.

Micro-Ground™ edge technology on the 4 edges for a seamless appearance

- No dirt build-up in seams for improved hygiene

Waterjet cutting

- Create logos and shapes that can be easily buffed for a seamless look

Excellent resistance to rolling loads: from cafeteria tables to heavy rolling equipment and medical beds.

Long wearing homogeneous construction

- Through and through chip design construction
- True non-directional design, no arrows to follow during installation
- Total thickness of 1/8" (3.17mm), thicker than other resilient floors, more durable and more forgiving of subfloor imperfections

Highly durable with a 20-year commercial limited warranty

- 30-year life expectancy

Superior indentation resistance as per ASTM F1914

"At UC Medicine, we are hard on our floor. As a level 1 trauma ED, our floors are put to the test and maintenance is key. In an active ED, we are challenged with a maintenance protocol and an inability to wax floors on a regular basis. Texas Granite is durable and has an inherent shine only requiring water and buffing and no wax. It is the perfect floor for us."

Erika Voss Turckes, AIA
Assistant Director of Interiors and Architectural Design
The University of Chicago Medicine

VTG-181 HERB, VTG-130 WHITE/GREY ▲

VTG-133 MINERAL GREY, VTG-130 WHITE/GREY ▲
VTG-133 MINERAL GREY, VTG-135 GREY/WHITE, VTG-130 WHITE/GREY ▶

Texas Granite can be buffed to achieve different shine levels. From a high gloss to a low gloss, you've got options!*

High gloss

Medium gloss

Low gloss

*SHINE LEVELS ARE ACHIEVED FROM BUFFING DURING MAINTENANCE. FACTORY TILES DELIVERED IN STANDARD GLOSS FINISH ONLY (SLIGHTLY LESS SHINY THAN HIGH GLOSS).

The floor that never needs to be waxed to stay beautiful

- Achieve your own gloss effect from matte to high gloss by simple buffing without wax—simply adjust the RPM level on the buffing machine
- Benefit from a continuous floor between areas that require different gloss levels, such as low gloss for critical care dementia application
- High reflective value lowers lighting costs

Easy maintenance and low installation cost

- Achieve high gloss by simple buffing — no wax required

Occupancy ready

- Spot cleaning possible
- No stripping or waxing required

Phthalate-free and low VOC, FloorScore® certified

- No negative impact on wastewater contamination from harmful waxing chemicals, and indoor air quality
- 30% savings on water and detergent use

Practical and cost saving maintenance advice, directly from a head custodian.

" Texas Granite is a solid vinyl tile that never needs a finish applied to create a high shine. There are now over 100,000 sq ft installed in common areas, corridors, classrooms and the cafeteria of our school. We have been very happy with the performance and ease of maintenance the Texas Granite flooring offers.

- *It has allowed us to decrease the man hours needed to maintain our floors.*
- *We are able to complete the cleaning of our cafeteria in half the time with half the manpower as with a traditional vinyl composition tile that requires many coats of wax or finish applied.*
- *We no longer need to use expensive chemical strippers and apply many coats of wax as before. Only a low-speed scrubber and neutral cleaner needed to clean.*
- *Using our mid-speed burnisher with an appropriate pad is all that is required to achieve a high shine after the floor is cleaned.*
- *We have used different pads to remove scratches caused during the final construction phase and return of teachers, equipment and furniture.*

Overall, we continue to be pleased with the performance as the floor becomes more resilient with each cleaning."

Mike Phillips
Head Custodian
Dade County High School

DADE COUNTY HIGH SCHOOL ▲

Required maintenance

	VCT		TERRAZZO		TEXAS GRANITE	
	Yes/No	Frequency	Yes/No	Frequency	Yes/No	Frequency
Dust mopping	✓	Daily	✓	Daily	✓	Daily
Wet/damp mopping	✓	Annually	✓	Daily	✓	Daily
Deep scrub/buffing	✓	Annually	✓	Annually	✓	Annually
Dry buff using 1,500 RPM machine	✗		✓	Quarterly	✓	Quarterly
Spray buff using 175-600 RPM machine	✓	Monthly	✗		✗	
Apply floor finish	✓	Quarterly	✗		✗	
Strip and wax	✓	Initially + Annually	✗		✗	
Strip and reseal	✗		✓	Initial + Every 5 years	✗	
Life expectancy	10 YEARS		30 YEARS		30 YEARS	

LIFE EXPECTANCY OF PRODUCT DOES NOT REPRESENT WARRANTY OF PRODUCT OR INSTALLATION.
TEXAS GRANITE 30 YEARS LIFE EXPECTANCY IS BASED ON PAST PROJECTS AND/OR EXISTING INSTALLATIONS.

LIFE CYCLE COST

When evaluating resilient flooring solutions, the entire product life cycle should be considered to determine the true cost of a product.

INTIAL COST + ANNUAL MAINTENANCE COST

The initial cost of Texas Granite is a fraction of Terrazzo's

AVERAGE INITIAL COST: MATERIAL, INSTALLATION AND INITIAL MAINTENANCE FOR 100,000 SQ FT

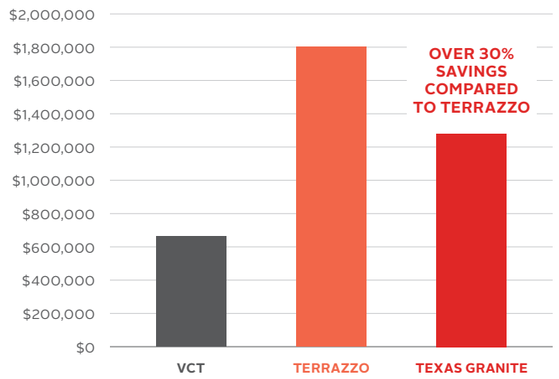

Texas Granite is the least expensive in maintenance cost at around $1.82/sq ft

AVERAGE ANNUAL MAINTENANCE COST FOR 100,000 SQ FT

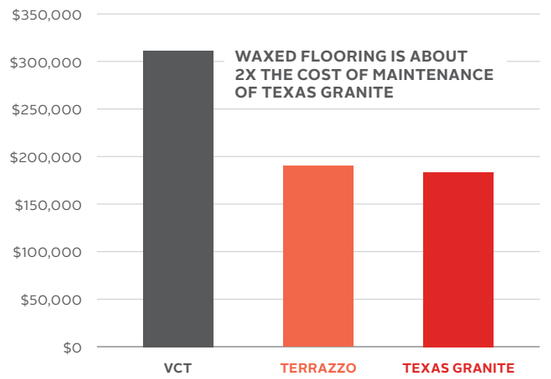

TOTAL LIFE CYCLE COST

LCCA Key Factors:

- Initial cost
- Routine maintenance
- Facility down time
- Repairability
- Product life span
- Replacement cost

Cumulative savings over 15 years of close to $2,000,000 with Texas Granite versus VCT

LIFE CYCLE COST COMPARISON FOR 100,000 SQ FT

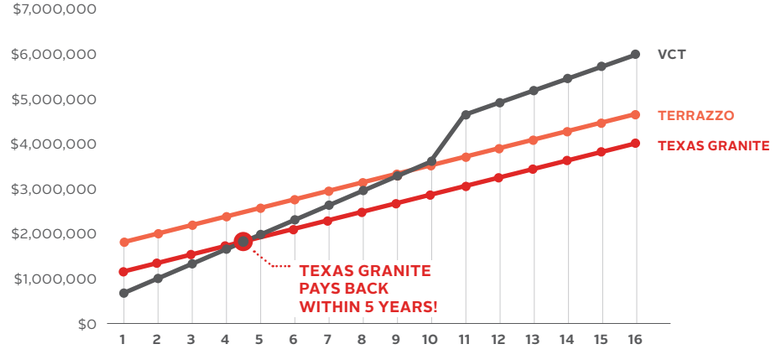

LABOR RATES, PRODUCT, AND MAINTENANCE COSTS HAVE BEEN CALCULATED BASED ON PAST PROJECTS, INDUSTRY KNOWLEDGE AND NATIONAL AVERAGES.

Flexible and hygienic for health care applications.

Texas Granite tiles can be heat welded and flash coved to the walls for a more hygienic solution as required in critical areas from operating rooms to clean rooms.

- For faster installation, we recommend 36" x 36" tiles
- Stronger flash coved joints and welded seams than other 2mm resilient floors

Heat welding rods are available in 10 coordinating colors:

VWH-15 WHITE	**VWH-17** LIGHT GREY	**VWH-35** DARK GREY	**VWH-19** BEIGE	**VWH-46** ALMOND
VWH-45 TAUPE	**VWH-77** AMBER	**VWH-95** BLUE	**VWH-81** GREEN	**VWH-22** BLACK

Safeguarding critical environments.

Also available in Electrotile®, our conductive and static dissipative tiles and certifications will protect from static charges in high tech applications, electronics and fiber optics, clean rooms and medical radiology environments.

AmericanBiltrite Flooring

TEXAS GRANITE®

TECHNICAL SPECIFICATIONS

Gauge	**3.17 mm**	**0.125"**
Sizes	**305 mm x 305 mm Micro-Ground™** **610 mm x 610 mm Micro-Ground™** **915 mm x 915 mm**	**12" X 12" Micro-Ground™** **24" X 24" Micro-Ground™** **36" X 36"**
Product Classification:		
ASTM F1700	Solid Vinyl Floor Tile	Class I, Type A, Monolithic
ASTM D2047	Static Coefficient of Friction (leather, Neolite)	≥ 0.5
ASTM D3389	Abrasion Resistance (H-22, 500g @ 1,000 cycles)	Pass
ASTM E648	Critical Radiant Flux CRF (W/cm²)	≥ 0.45
ASTM E662	Smoke Density	≤ 450
ASTM F137	Flexibility	Pass
ASTM F925	Chemical Resistance	Meets requirements (details upon request)
ASTM F970	Static Load	≤ 0.005"
ASTM F1514	Heat Stability	ΔE ≤ 8.0
ASTM F1515	Light Stability	ΔE ≤ 8.0
ASTM F1914	Indentation	residual < 8%
ASTM F2055	Squareness	0.010" maximum
ASTM F2199	Dimensional Stability	Pass
Indoor Air Quality (IAQ):		FloorScore Certified by SCS Certification
Volatile Organic Compounds (VOCs)		Registration Number SCS-FS-01495
Maintenance		No waxing
Adhesives	AD-610	Regular traffic
	AD-590	Heavy rolling loads, under patients' beds
	AD-599MR	High Moisture Substrate, heavy rolling loads, under patients' beds
Limited Wear Warranty		20 years

Please note that technical website documents prevail.

® Registered Trademark of American Biltrite

american-biltrite.com

Made in North America since 1913

floor score

ISO 9001•14001 CERTIFIED

VERIFIED by SCS Global Services ENVIRONMENTAL PRODUCT DECLARATION BASED ON LCA

Samples available at: material bank

AmericanBiltrite
Flooring

® / Texas Granite is a registered trademark of American Biltrite

American Biltrite, 200 Bank Street, Sherbrooke, Quebec, Canada J1H 4K3
To order samples: flooring@american-biltrite.com | 1.800.437.8743 | Fax 1.800.810.5731 | Technical Services: 1.800.479.0190

Photos | Pages 4-5 and page 6 top left: ©Halkin Mason Photography
Printed in Canada BRO-E5-VTG Issued: 01/2026