DISTRIBUTION CENTER LOCATIONS

The products that you need, **close to you!**

- Six fully-stocked warehouses across the United States and Canada
- Broad product inventory assuring availability
- Warehouse pick-up available for local customers

Give us a call and get the best kind of service – the human kind!

Toll-free: 1-888-275-7075
Weekdays 8 a.m. - 5 p.m. EST



We are a proud member of the following associations:

GFA Gasket Fabricators Association · NAHAD · NIBA The Belting Association · CIM ICM · SME Society for Mining, Metallurgy & Exploration

DISTRIBUTED BY :

Toll-free
1-888-275-7075

200 Bank Street
Sherbrooke, Quebec
J1H 4K3

american-biltrite.com
rubber@american-biltrite.com

AmericanBiltrite
IndustrialRubber

BRO IE FAB
10/2026

AmericanBiltrite
IndustrialRubber

INTERFUSE™


FABRIC-REINFORCED SHEETS & DIAPHRAGM




american-biltrite.com

INTERFUSE™

A BROAD SELECTION OF FABRIC-REINFORCED SHEET RUBBER

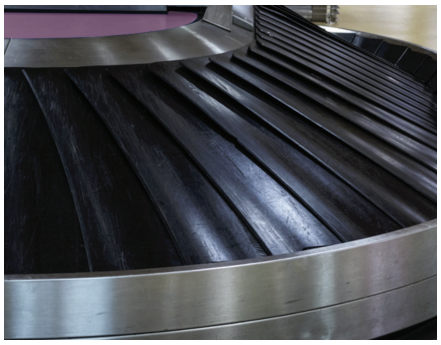



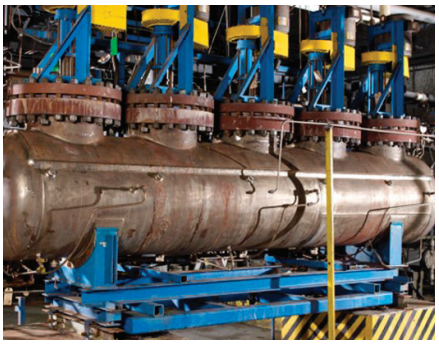

WHY CHOOSE INTERFUSE™?

- Quality backed by over 110 years of expertise
- Products stocked in a variety of polymers and fabrics
- Fabric-reinforced rubber resists deformation
- Excellent in reducing gasket creep where heavy flange loading is needed
- Ideal where mechanical fastening is essential
- Offers great stability under high compression loads
- Engineered for dynamic applications where flexibility and burst strength are required

APPLICATIONS:


For industrial applications requiring high tear strength, dimensional stability and flexibility.

- AIR
- HOT WATER
- COLD WATER
- LOW-PRESSURE STEAM
- SATURATED STEAM



FABRIC-REINFORCED AT A GLANCE

AB-3220

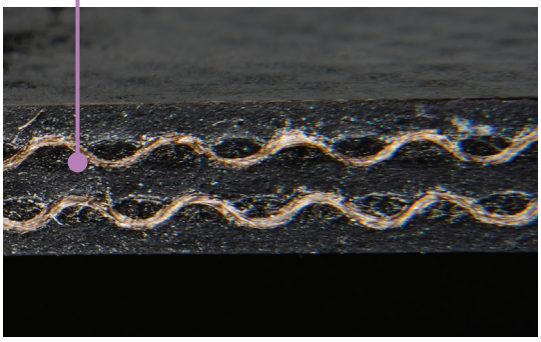


HIGH QUALITY, DURABLE, STABLE & MULTI-PURPOSE

MORE OPTIONS. BETTER FIT.

American Biltrite's fabric-reinforced rubber line offers more choices to meet a wide range of industrial requirements.



Up to 4 Ply



Between
300-800 psi
Mullen Burst



Choose from
SBR, CR, EPDM or
Custom Compounds

TECHNICAL SPECIFICATION

PRODUCTS	POLYMER	FABRIC	MULLEN BURST (TYPICAL / PLY)	TENSILE (PSI)
VALUE/GENERAL PURPOSE				
IM-950	CR	Nylon	300 psi	600 min.
IM-2100	SBR	Nylon	300 psi	500 nom.
COMMERCIAL DIAPHRAGM				
AB-3220	SBR/NBR/CR	14 oz. Nylon	800 psi	600 min.
AB-3228	SBR/NBR/CR	4.3 oz. Nylon	600 psi	600 min.
INDUSTRIAL REINFORCED				
AB-2102	SBR	2 oz. Polyester	300 psi	700 min.
AB-3560	EPDM	4.3 oz. Nylon	600 psi	800 min.
AB-951	NBR/SBR/CR	2 oz. Polyester	300 psi	600 min.
AB-984	SBR	2 oz. Polyester	300 psi	500 min.
SUPERIOR GRADE DIAPHRAGM				
AB-3205	CR/SBR	14 oz. Nylon	700 psi	1400 min.
AB-3210	CR/SBR	14 oz. Nylon	800 psi	1400 min.
AB-3275	CR	9 oz. Polyester	600 psi	1200 min.

Website version prevails.

CONTACT AMERICAN BILTRITE FOR COMPOUND SELECTION, TECHNICAL ASSISTANCE, AND SAMPLES.

ISO 9001•14001 CERTIFIED